



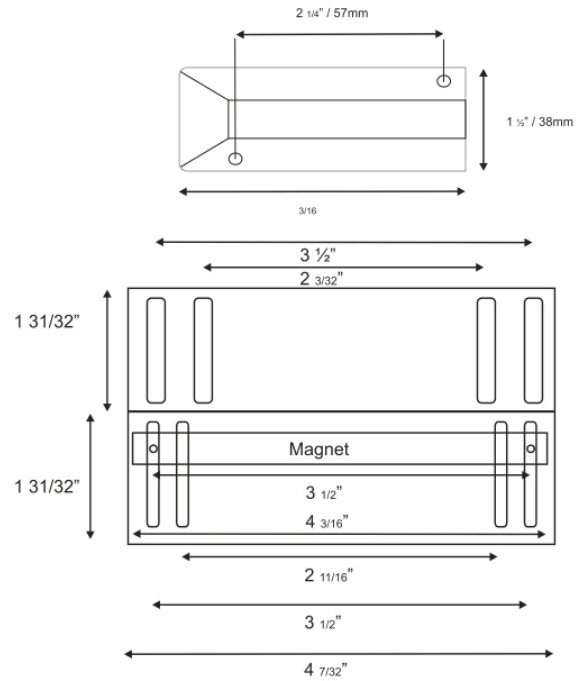

AIN TECHNOLOGY GROUP

# PS-2023/2022 Industrial Overhead Door Contact

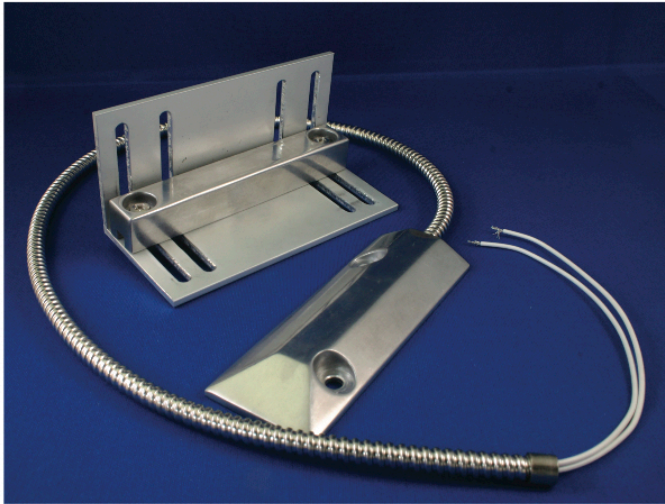

## Specifications:

Connection: 27" 22 gauge wire enclosed Armoured Cable

Output: 2023 - Form A / Normally Closed w / Magnet Present  
2022 - Form C / Dual Output (Form A / B - N/C \ N/O)

Contact Rating: 2023 - 28VDC - 500mA - 10W  
2022 - 28VDC - 500mA - 3W


Operating Temperature: 32° F - 120° F (0° C - 49° C)

Gap: 3 in (76.2mm) Max

Reed Switch Hermetically Sealed in Heavy Duty Shock Resistant Aluminum "Flat Plate" Housing

Rhodium Over Gold Reed Switch

High Grade Magnet Enclosed in Aluminum Housing, Attached to Custom Fit L-Bracket

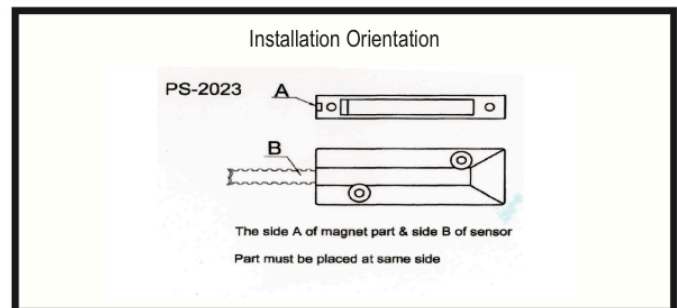

AIN TECHNOLOGY GROUP

AIN Technology Group  
Hotline : 86 - 0755-23003181  
Mailbox : sales02@ain-cn.com  
Address : No.101 A11  
Hengfeng Industrial Park,  
Hezhou, Bao An, ShenZhen, China